




REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	05/05/02	S. HOPKINS

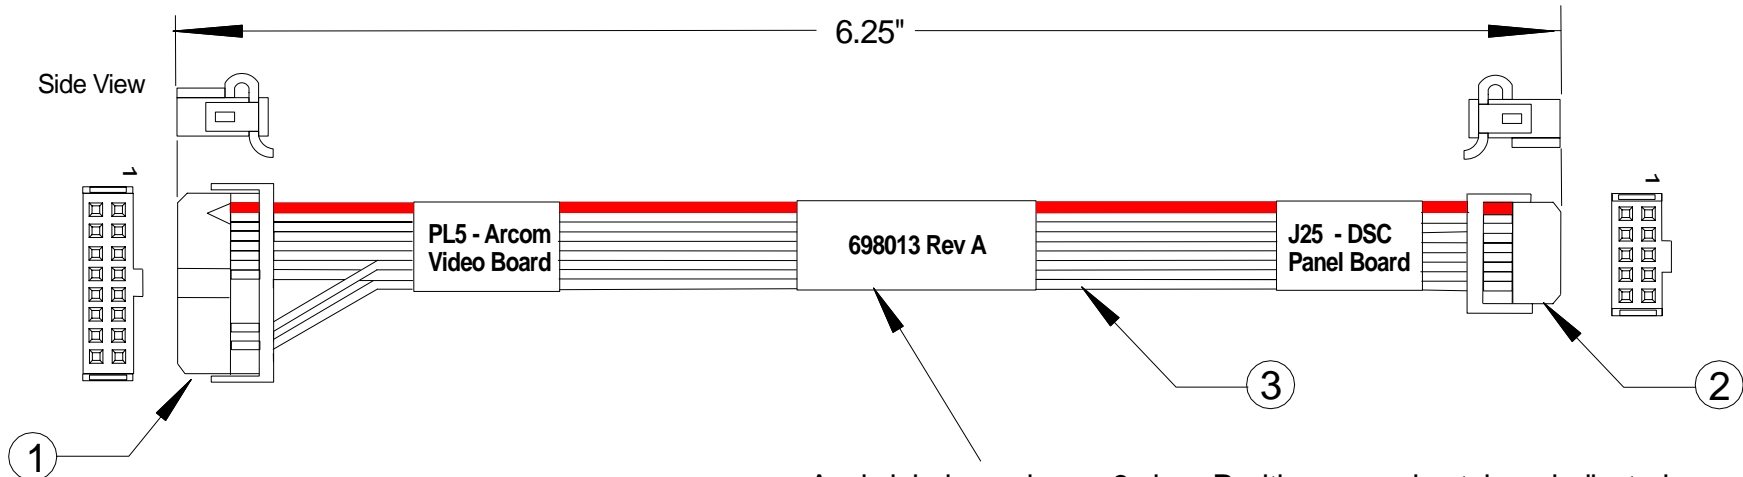

Apply labels as shown, 3 plcs. Position approximately as indicated.
Print black text as shown on white label.

WIRE CONNECTION TABLE

PL5	J25	Signal Ref
1	1	Red
2	2	Red Return
3	3	Green
4	4	Not connected
5	5	Blue
6	6	Green Return
7	NC	Not connected
8	8	Not connected
9	NC	Blue Return
10	NC	Ground
11	NC	Ground
12	7	H Sync
13	NC	Not connected
14	9	V Sync
15	NC	Not connected
16	NC	Not connected

Parts List:

- ① 2x8, Insulation Displacement Connector, Female, Ribbon, with strain relief. (Phyco 1100-16 or equivalent)
- ② 2x5, Insulation Displacement Connector, Female, Ribbon, with strain relief. (Phyco 1100-10 or equivalent)
- ③ 0.050" Ribbon cable, 10 conductor. (Hitachi 2807-10 or equivalent)
Strip off one conductor (not stripe) to make 9 conductor ribbon cable.
Note connections to the 2x8 connector require special preparation. See Wire Connection Table.

		Diamond Systems Corporation		
		Cable, Video, IDC16F to IDC10F, 6.25" Arcom Video Board		
Not to scale	SIZE	FSCM NO.	DWG NO.	REV
	A		698013	A
	SCALE		SHEET	1 of 1

